

Syddansk Universitet

## Application Framework with Abstractions for Protocol and Agent Role

Kristensen, Bent Bruun

*Published in:*

Proceedings of the Fourth International Workshop on Engineering Multi-Agent Systems

*Publication date:*

2016

*Document Version*

Version created as part of publication process; publisher's layout; not normally made publicly available

[Link to publication](#)

*Citation for pulished version (APA):*

Kristensen, B. B. (2016). Application Framework with Abstractions for Protocol and Agent Role. In M. Baldoni, J. P. Müller, I. Nunes, & R. Zalila-Wenkstern (Eds.), Proceedings of the Fourth International Workshop on Engineering Multi-Agent Systems. (pp. 104-116)

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal ?

### Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Application Framework with Abstractions for Protocol and Agent Role

Bent Bruun Kristensen

Maersk Mc-Kinney Moller Institute, University of Southern Denmark, Denmark  
bbkristensen@mmmi.sdu.dk

**Abstract.** In multi-agent systems, agents interact by sending and receiving messages and the actual sequences of message form interaction structures between agents. Protocols and agents organized internally by agent roles support these interaction structures. Description and use of protocols based on agent roles are supported by a simple and expressive application framework.

**Keywords:** Multi-agent system, Protocol, Agent role, Reactive and proactive role, Application framework.

## 1 Introduction

Agents are active, autonomous, and smart, i.e. among others capable of reactive and pro-active behavior [1]. A multi-agent system consists of a number of agents interacting with one-another—and to successfully interact, agents require the ability to cooperate, coordinate, and negotiate with each other. We describe interactions by protocols that relate agent roles of such communicating agents.

Abstraction is essential: “Without abstraction we only know that everything is different” [2] meaning that use of abstractions to describe observations is essential for the resulting understanding. Dialogues and agent roles are abstractions, i.e. by these concepts the developer can understand and describe the organization structure of agents as well as the interaction structure between communicating agents.


Our aim is to support protocols that capture communication between agent roles by an object-oriented application framework [3] with agents, reactive role, proactive role and message. The underlying agent model and the application framework are illustrated by the Contract Net [1]. The model and framework are compared to related work and evaluated.

## 2 Agent Model

**Reactive and Proactive Roles.** Agents communicate by sending and receiving messages representing events as illustrated in Fig. 1. An agent consists of a varying number of reactive and proactive roles. Reactive and proactive roles are abstractions for internal organization of an agent and messages are sent from and received by these


roles. If a message is sent to the agent itself a default reactive role of the agent receives the message.

The roles of an agent execute one at a time and in a non preemptive way [4], i.e. they exhibit cooperative multitasking, in which case a role can self-interrupt and voluntarily give up control. Reactive and proactive roles are stereotypes but combinations can be described. Each reactive and proactive role has a list of messages to be handled on a first come first served basis. A reactive role repeats the execution of an action to take care of its list of messages whenever the handling of the previous message is completed and the awaiting message list is not empty. A proactive role consists of a single execution of an action that takes care of pausing as well as waiting and handling messages until its purpose is completed.

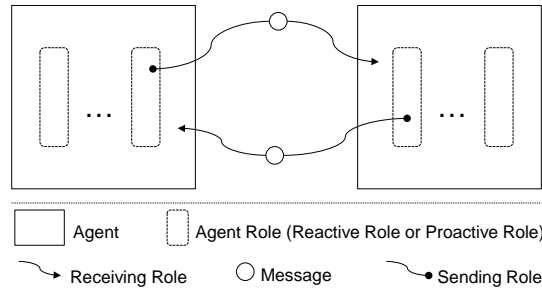


**Fig. 1.** Agents organized by reactive and proactive roles.

**Protocols.** A protocol describes a process where an initiator initializes the interaction by sending messages to a number of participants where after these participants may reply to the initiator as part of the interaction, etc. The protocol takes place between proactive roles of agents. The protocol and the proactive roles together form abstractions over an interaction structure between the involved agents.

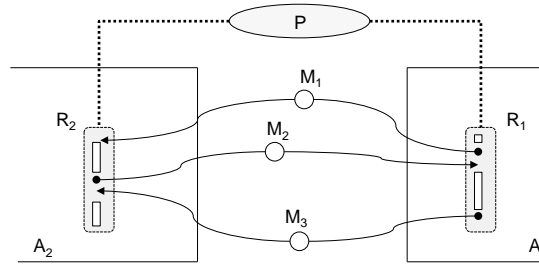


**Fig. 2.** Illustration of protocol and proactive roles

Fig. 2 illustrates a protocol  $P$  between proactive roles  $R_1$  and  $R_2$  in agents  $A_1$  and  $A_2$ . Role  $R_1$  initializes the interaction by sending a message  $M_1$  to role  $R_2$ . Role  $R_2$  replies with message  $M_2$  to  $R_1$ . In this manner a protocol between  $R_1$  and  $R_2$  may describe a continued interaction between  $R_1$  (from  $A_1$ ) and  $R_2$  (from  $A_2$ ). The protocol illustrated in Fig. 2 is similar to the coroutine mechanism of SIMULA [5] in the sense that a role sends a message, immediately suspends itself and the receiving role is resumed.

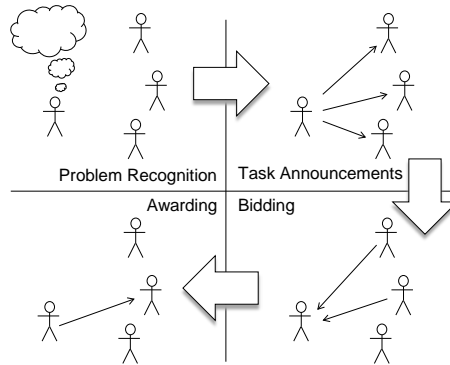

**Fig. 3.** Illustration of Contract Net

**Example: Contract Net.** Fig. 3 illustrates the Contract Net with a collection of stickmen. Each stickman in the collection can, at different times or for different tasks, be involved in several simultaneous tasks as both manager and contractor. When a stickman gets a composite task (or for any reason cannot solve its present task), it breaks the task into subtasks (if possible) and announces them (acting as a manager), receives bids from potential contractors, and then possibly awards a contractor. If no bids are received after a given period of time the manager gives up the negotiation. If a bid is not awarded after a given period the contractor gives up the negotiation.

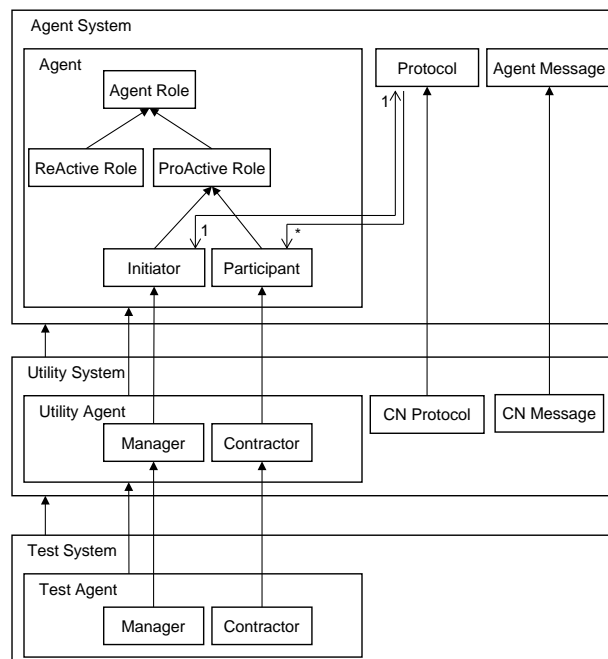

**Fig. 4.** Conceptual Model showing the contents of and relations between Agent System, Utility System and Test System

A model for the Contract Net includes: A protocol is set up with a proactive role for the manager agent (the initiator) and a proactive role for each of the contractor agents (the participants). A manager maintains a negotiation by initiating an interaction with a number of contractors. A contractor receives a task announcement and may reply with a bid to the manager. Having received bids the manager chooses among these and may reply with an award to the chosen contractor in which case a contract is established.

### 3 Framework Overview

Fig. 4 illustrates the conceptual model of the application framework with `Agent_System` that is specialized to another application framework `Utility_System` (to support various protocols with the Contract Net as an example) that in turn is used in the application `Test_System`. The contents of and relations between `Agent_System`, `Utility_System` and `Test_System` are described in the following sections.

```
... class Agent_System {
...     abstract class Protocol {
...     Protocol (Agent initiator, Agent[] participant) {
...         initiatorRole = initiator.newInitiatorRole(this);
...         for (int i = 0; i < ...; i++) {
...             participantRole[i] =
...                 participant[i].newParticipantRole();
...         };
...     }
...
...     Agent.Initiator initiatorRole;
...     Agent.Participant[] participantRole = ... ;
... }

... abstract class Agent extends ... implements ... {
...
...     abstract class Agent_Role extends ... {...}
...
...     abstract class ReActive_Role extends Agent_Role {
...     abstract ... int Act(Agent_Message am)
...     };
...
...     abstract class ProActive_Role extends Agent_Role {
...     abstract ... void Act()
...     };
...
...     abstract class Initiator extends ProActive_Role {...}
...     abstract class Participant extends ProActive_Role {...}
...     abstract Initiator newInitiatorRole(Protocol p)
...     abstract Participant newParticipantRole();
... }

... abstract class Agent_Message extends EventObject {...}
}
```

**Fig. 5.** Application Framework: `Agent_System`

## 4 Application Framework: Agent System

Fig. 5, 6 and 7 show extracts of the textual version of the application framework Agent\_System with classes and methods shown in grey. Fig. 5 shows class Agent\_System with abstract classes Agent, Protocol and Agent\_Message. Class Agent has abstract classes ReActive\_Role and ProActive\_Role (extending class Agent\_Role). Class ProActive\_Role is extended to classes Initiator and Participant both related to class Protocol. In addition classes ReActive\_Role and ProActive\_Role include the abstract method Act(...). The Act(...) method of class ReActive\_Role returns a delay until next invocation and is invoked repeatedly with the next message as parameter while messages are waiting. The Act() method of class ProActive\_Role is invoked only once and its execution may include pausing, awaiting messages, etc. until its execution is completed. Abstract methods newInitiatorRole and newParticipantRole are used by Protocol to instruct actual specializations of Agent to instantiate actual specializations of Initiator and Participant. Class Protocol instantiates and starts the execution of InitiatorRole (with the Protocol object as parameter) for InitiatorAgent and of ParticipantRole for each of the ParticipantAgents.

```
... abstract class Agent_Role extends ... {  
... void rolePause(int sleepTime) {...}  
... Agent_Message roleAwait() {...}  
... void replyMessage(Agent_Message rm, Agent_Message am) {...}  
... Agent_Message handleMessage() {...}  
...  
}
```

**Fig. 6.** Interaction methods of class Agent\_Role

Fig. 6 shows extracts of selected interaction methods of class Agent\_Role (inherited by ReActive\_Role and ProActive\_Role):

- rolePause(...), the role pauses for a period of time
- roleAwait(), the role waits until a message is received and then returns the message
- replyMessage(...), a message is sent to a role of another agent as a reply to a message received from that role
- handleMessage(), the next waiting message is returned (if any and else null)

```
... abstract class Agent_Role extends ... {  
... void initiateProtocol(Agent_Message am, Participant p) {...}  
... void replyProtocol(Agent_Message ram, Agent_Message am) {...}  
...  
}
```

**Fig. 7.** Methods initiateProtocol and replyProtocol


Class `Protocol` sets up the protocol between agent roles—the `Initiator` and the `Participant` agents. Fig. 7 shows extracts of the interaction methods related to the protocol:

- `initiateProtocol(...)`, the `Initiator` sends a message `am` to a `Participant` to initialize the protocol.
- `replyProtocol(...)`, either the `Initiator` or a `Participant` send a message `ram` in reply to message `am` received within the protocol.

## 5 Application Framework: Utility System

Class `Agent_System` can be used directly to construct a multi-agent system with reactive and proactive agent roles and protocols. We choose to extend `Agent_System` to another abstract class `Utility_System` to illustrate an example of an abstract protocol—the `Contract Net`. Class `Utility_System` is then specialized in class `Test_System` as an actual use.

Fig. 8 shows the ingredients of the specialization of `Agent_System` to `Utility_System`: `Protocol` is specialized to `CN_Protocol` and the proactive roles `Initiator` and `Participant` to `Manager` and `Contractor`, respectively. Classes `Manager` and `Contractor` specify their own `Act()` method according to the `Contract Net`. And each of these `Act()` methods makes use of additional methods (shown as dotted) to be implemented in the actual use of the `Utility_System`.

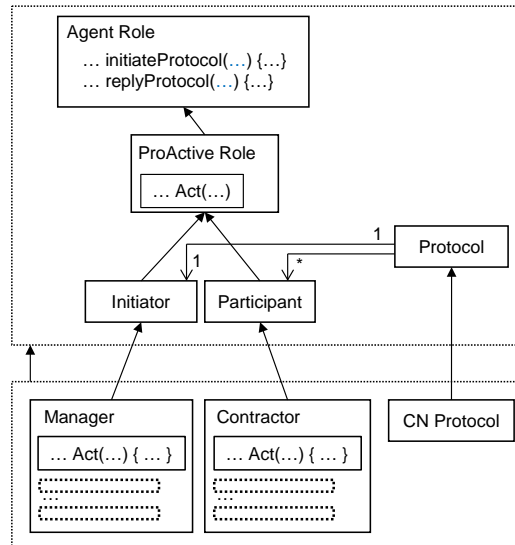

**Fig. 8.** Specialization of `Agent_System` to `Utility_System`

Fig. 9 illustrates how `Utility_System` and `Utility_Agent` extend `Agent_System` and `Agent`, respectively. Class `Protocol` is extended to `CN_Protocol` that initializes a `Manager` role for the `Initiator` agent and a `Contractor` role for each of the `Participant` agents.

```

... abstract class Utility_System extends Agent_System {

... class CN_Protocol extends Protocol {
... CN_Protocol (Agent initiator, Agent[] participant) {
...     super(initiator, participant);
...     ...
... }

... Utility_Agent.Manager managerRole;
... Utility_Agent.Contractor[] contractorRole = ... ;
...
}

... abstract class Utility_Agent extends Agent {

... abstract class Manager extends Initiator {
... Manager (Protocol protocol) {...}
... void Act() {...}
... };

... abstract class Contractor extends Participant {
... void Act() {...}
... }
}
}

```

**Fig.9.** Utility\_System with CN\_Protocol

When a Protocol is instantiated as shown in Fig. 10 its constructor initializes ManagerRole through the executing agent and ContractorRoles through otherAgents.

```

new CN_Protocol(Test_Agent.this, otherAgents);

```

**Fig. 10:** Creation of a CN\_Protocol

Fig. 11 shows abstract class Manager as an extension of Initiator. Method Act() of class Manager uses the abstract methods (*hot spots* cf. [6]) in italics (implemented in Test\_System).

```

... abstract class Manager extends Initiator {
...
... void Act() {...}

... abstract CN_Task createCN_Task(int t)
... abstract CN_Task.Offer createOffer(CN_Task t)
... abstract CN_Message newOfferMessage(Agent a, CN_Task t)
... abstract int bidDelayTime()
... abstract CN_Message selectBid(CN_Message[] ms, int l)
... abstract CN_Task.Award createAward(CN_Task t)
... abstract CN_Message newAwardMessage(Agent a, CN_Task t)
... }

```

**Fig. 11.** Class Manager

Fig. 12 shows the actual sequencing in the Act() method of class Manager—illustrated by the comments: Prepare and send offers, Wait a while until



bids have arrived, Collect received bids, Select a bid and prepare and send an award.

```

... void Act() {
    CN_Protocol cnd = (CN_Protocol) protocol;
    CN_Message m;
    // ... .. Prepare and send offers ...
    int taskNo = allTasks++;
    for (int i = 0; i < cnd.contractorAgent.length; i++) {
        CN_Task t = createCN_Task(taskNo);
        if (t.addOffer(createOffer(t))) {
            m = newOfferMessage(cnd.contractorAgent[i], t);
            initiateProtocol(m, cnd.contractorRole[i]);
        };
    };
    // ... .. Wait a while until bids have arrived ...
    rolePause(bidDelayTime());
    // ... .. Collect received bids ...
    CN_Message[] ms = new CN_Message[...];
    int i = 0;
    while ((m = (CN_Message) handleMessage()) != null) {
        if (m.typeMessage(CN_Kind.BID)) {
            ms[i++] = m;
        };
    };
    // ... .. Select a bid, prepare and send an award ...
    if ((m = selectBid(ms, i)) != null) {
        CN_Task t = m.cnTask;
        t.addAward(createAward(t));
        CN_Message mm = newAwardMessage(m.fromAgent, t);
        replyProtocol(mm, m);
    };
}

```

**Fig.12.** Method Act() of Manager

Fig. 13 shows abstract class Contractor as an extension of Participant. Method Act() of class Contractor uses the abstract methods in italics (implemented in Test\_System).

```

... abstract class Contractor extends Participant {

    ... void Act() {...}

    ... abstract CN_Task.Bid createBid(CN_Task t)
    ... abstract CN_Message newBidMessage(Agent a, CN_Task t)
    ... abstract int awardDelayTime()
    ... abstract void handleAward(CN_Message m)
}

```

**Fig. 13.** Class Contractor

Fig. 14 shows the actual sequencing in the Act() method of class Contractor—illustrated by the comments: Wait to receive an offer, Possibly prepare and send a bid, Wait to receive an award, Possibly receive and handle the award.

```

... void Act() {
// ... .. Wait to receive an offer ...
CN_Message m = (CN_Message) roleAwait();
if (m.typeMessage(CN_Kind.OFFER)) {
// ... .. Possibly prepare and send a bid ...
CN_Task t = m.cnTask;
if (t.addBid(createBid(t))) {
CN_Message mm = newBidMessage(m.fromAgent, t);
replyProtocol(mm, m);
// ... .. Wait to receive an award ...
rolePause(awardDelayTime());
// ... .. Possibly receive and handle the award ...
if ((m = (CN_Message) handleMessage())!=null) {
if (m.typeMessage(CN_Kind.AWARD)) {
handleAward(m);
};
};
} else return;
};
}
}

```

**Fig. 14.** Method Act() of Contractor

Fig. 15 shows CN\_Message as an extension of Agent\_Message where CN\_Task represents the actual task to be undertaken (with respect to Offer, Bid and Award) and CN\_Kind enumerates the actual message types in Contract Net.

```

... class CN_Message extends Agent_Message {
... CN_Message(... , CN_Task cnt, CN_Type cnk, ...) {
...
}
...
... CN_Kind cnk;
... CN_Task cnt;
}

... class CN_Task {...}

enum CN_Kind {OFFER, BID, AWARD}

```

**Fig. 15.** Classes CN\_Message, CN\_Task and CN\_Kind

## 6 Test System

Fig. 16 shows Test\_System, as an extension of Utility\_System where class Test\_Agent extends Utility\_Agent. The abstract methods newInitiatorRole and newparticipantRole are implemented to return objects of the actual Manager and Contractor classes specialized from Manager and Contractor of Utility\_Agent. Classes Manager and Contractor implement the abstract methods from Fig. 11 and 13, respectively.

```


... class Test_System extends Utility_System {
...   class Test_Agent extends Utility_Agent {
...     Initiator newInitiatorRole(Protocol protocol) {
...       return (new Manager((CN_Protocol) protocol));
...     }
...     Participant newParticipantRole() {
...       return (new Contractor());
...     }
...   }
...   class Manager extends Utility_Agent.Manager {...}
...   class Contractor extends Utility_Agent.Contractor {...}
... }
}

```

**Fig. 16.** Test\_System with Test\_Agent

The protocol using the OFFER, BID and AWARD messages is simple and therefore the structures of the roles illustrated in Fig. 12 and 14 are simple too. But these roles would remain simple if they involved additional interaction, i.e. such as re-announcing subtasks, continued negotiations about details, etc. A Test\_Agent involved in several simultaneous contract negotiations would not complicate the description but only require additional instantiations of the existing protocol.

Fig. 17 is a snapshot of the dynamic flow of messages between agents. This feature is a part of the application framework, i.e. it is general although it is parameterized with the actual extension of the framework—in this case Contract Net. For each agent, i.e. for Test\_Agent<sub>2</sub> there is a column of messages sent Messages Out: 6 and received Messages In: 6 showing total number of messages and a list of actual messages. The actual messages are colored to indicate the status of a message, i.e. *sent*, *received*, *forwarded*, *handled* and *to be removed*. It can be seen from Fig. 17 that TEST\_Agent<sub>2</sub> sends offer 5 that is received by TEST\_Agent<sub>1</sub>; TEST\_Agent<sub>1</sub> replies with bid 5 that is received by TEST\_Agent<sub>2</sub>; TEST\_Agent<sub>2</sub> replies with award 5 that is received by TEST\_Agent<sub>1</sub>. This protocol is similar to the M<sub>1</sub>, M<sub>2</sub>, M<sub>3</sub> protocol illustrated in Fig. 2.

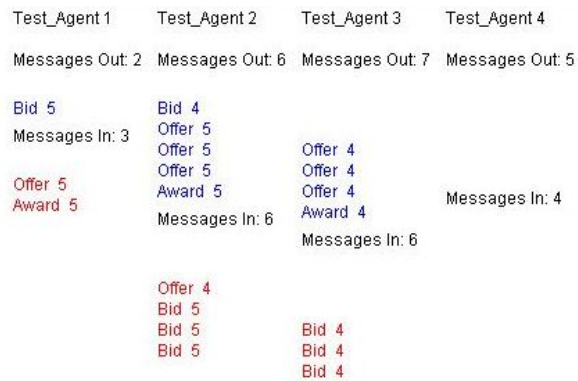

**Fig. 17.** Flow of messages between agents

## 7 Background, Related Work, Evaluation

**Background.** The FLIP project [7] investigates a transportation system including moving boxes from a conveyor belt onto pallets and transporting these pallets in the high bay area of the LEGO® factory with AGVs, no human intervention and only centralized control. A toy prototype includes agents in the form of LEGOBots based on a LEGO® Mindstorms™ RCX brick extended with a PDA and wireless LAN. The DECIDE project [8] includes a number of real applications: Control of a baggage handling system in a larger airport in Asia; Intelligent control of handling material with recipes in productions processes; Coordination and planning of large vehicle transports at a shipyard; Design and implementation of a very flexible packing machine. These applications illustrate that the complexity of the communication structure between agents needs to be supported by structurally simple and expressive abstractions.

A course about agent oriented programming includes the construction of a multi-agent system based on the application framework. The task is to design and implement the management of the evolution of a collection of animal parks. A solution is to use reactive roles to react to incoming messages concerning actual changes—and proactive roles to support buying and selling animals by negotiating with other agents. The experience includes that the complexity of the communication structure of simple toy-like multi-agent systems is overwhelming, because the basic communication sequence is simple but the management of several simultaneously ongoing communication sequences is complicated.

**Related Work.** The application framework is for *implementing* protocols and agent roles, i.e. for *describing* abstractions and *using* these in concrete applications. The purpose of [9] is *modelling* of agent interaction protocols in AUMML as a set of UML idioms and extensions. In [10] the purpose is to *specify, validate and evaluate* interaction protocols expressed as recursive colored petri nets. The purpose of [11] is to *experiment* with the enhancement of object orientation with agent-like interaction including protocol and role introduced in the `powerJava` extension of Java to allow session-aware interactions. In [12] the purpose is to load interaction protocols dynamically through role, action and message ontologies, process description with decision-making rules and a three-layer agent architecture. Dialogue games are the basis for agent interaction protocols for convincing through arguments—in [13] by formal definition of the PARMA protocol—in [14] by a categorization of types of dialogue games with examples of protocols.

The use of object-oriented languages for creating frameworks with concepts from multi-agents is well known, as well as the notion of protocol, agent role, reactive and proactive agents. But the actual form of protocol, reactive and proactive roles of agents and their inclusion in the application framework is original. A protocol is between one initiator and several participants, i.e. the initiator sends a message to the participants that may send a message back to the initiator, i.e. the initiator communicate with each of the participants but the participants do not communicate together. Protocols may be organized with part-protocols to support that a participant (as part of an ongoing protocol) may be initiator of a part-protocol.

Reactive and proactive roles are related to *behaviours* in JADE [15] and *plans* in JACK [16]: In JADE the agent life-cycle is described by behaviors by extending the `Behaviour` class. An agent can execute several behaviors in parallel. However, behavior scheduling is not preemptive, but cooperative—and everything occurs within a single Java thread. In JACK an agent will look for the appropriate plans to handle goals and events. The plan (an abstraction above object-oriented constructs) inherits from a `Plan` class that implements the plan's base methods and the underlying functionality. Neither behaviors nor plans support the notion of reactive and proactive role explicitly but may be utilized to expose similar behavior. In JADE `createReply()` creates a new message properly setting the receivers and various fields used to control the conversation. In JACK `reply(received, sendBack)` sends a message back to an agent from which a previous message has been received without triggering a new plan.

**Evaluation.** Each of the  $n$  agents in the Contract Net example may send an offer to the  $n-1$  other agents that may reply back etc.:

- Without the protocol abstraction we assume each agent has one (typically reactive) role, i.e.  $n$  roles in total. However such a role has to manage up to  $n$  ongoing communications (one of which is between up to  $n$  agents) each with their own state of the communication. Without the protocol abstraction each role takes care of  $n$  communications.
- With the protocol abstraction each agent has a manager role and sends an offer to  $n-1$  other agents each with a contractor role, i.e. in total  $n$  roles. When  $n$  agents send an offer this becomes  $n^2$  roles in total. However each role is simple as illustrated in Fig. 12 and 14 because each role is involved in exactly one protocol, i.e. the state of the communication is captured by the role. With the protocol abstraction each role takes care of 1 communication.

In summary the agent model and framework are simple and understandable but still expressive. By the abstractions protocol and agent role we substitute the usual complexity of describing the handling (including state and progress) of several simultaneously ongoing communications by simple, statically structured protocols and roles.

By identifying protocol and agent roles in the Contract Net we classify the interaction and the contributions of the agents by means of `CN_protocol`, `Manager` and `Contractor`. However, abstraction includes not only classification but also specialization and composition: We may see `CN_protocol`, `Manager` and `Contractor` as a general description of the Contract Net, so that specialized versions of Contract Net can be described by specializations of each of these abstractions, e.g. `CN_protocol_X`, `Manager_X` and `Contractor_X`. Similarly, another more extensive protocol can be composed by using the Contract Net as a part protocol by using `CN_protocol`, `Manager` and `Contractor` in the description of this protocol.

Classes `Protocol`, `Initiator` and `Participant` together form abstractions over an interaction structure. `Initiator` and `Participant` are local to an `Agent` in order to have access to the local state of the `Agent`. Alternative solutions may be inspired from [17] where *Association* is a central abstraction over interaction sequences and integrate activities and roles of concurrent autonomous entities.

## 7 Summary

Typically the communication structure between agents becomes complicated because powerful abstractions are not available for modelling and programming. The application framework with protocols based on agent roles of agents offer abstract description of simple and expressive multi-agent communication structures.

**Acknowledgments.** We thank Palle Nowack and Daniel May for inspiration and support.

## References

- [1] M. Wooldridge. *An Introduction to Multiagent Systems*. Wiley, 2/e, 2009.
- [2] G. Booch. Private communication, 2007.
- [3] M. E. Fayad, R. E. Johnson, D. C. Schmidt. *Building Application Frameworks: Object-Oriented Foundations of Framework Design*. Wiley, 1990.
- [4] D. Lea. *Concurrent Programming in Java: Design Principles and Patterns*. Addison Wesley 2007.
- [5] O.-J. Dahl, B. Myhrhaug, K. Nygaard. *SIMULA 67 Common Base Language* (Editions 1968, 1970, 1972, 1984), Norwegian Computing Center, Oslo, 1968.
- [6] W. Pree. *Meta Patterns: A Means for Capturing the Essentials of Reusable Object-Oriented Design*. *Proceedings of the 8th European Conference on Object-Oriented Programming* (Springer-Verlag), 150–162, 1994.
- [7] L. K. Jensen, B. B. Kristensen, Y. Demazeau. *FLIP: Prototyping Multi-Robot Systems*. *Journal of Robotics and Autonomous Systems*. Vol. 53, (3, 4), 2005.
- [8] K. Hallenborg. *Intelligent Control of Material Handling Systems*. In: *Environmentally Conscious Materials Handling*, M. Kutz (ed.), John Wiley & Sons, 2009.
- [9] J. Odell, H. Van Dyke Parunak, B. Bauer. *Representing Agent Interaction Protocols in UML*. *First international workshop, AOSE 2000 on Agent-oriented software engineering*, 121 - 140, Springer, 2001.
- [10] H. Mazouzi, A. El Fallah Seghrouchni, S. Haddad. *Open Protocol Design for Complex Interactions in Multi-agent Systems*. *Autonomous Agents and Multi-Agent Systems*, 2002: 517-526.
- [11] M. Baldoni, G. Boella, L. van der Torre. *Importing Agent-like Interaction in Object Orientation*. *Proceedings of the 7th WOA Workshop, From Objects to Agents*, 2006.
- [12] M. Wang, Z. Shi, W. Jiao. *Dynamic Interaction Protocol Load in Multi-agent System Collaboration*. *Multi-Agent Systems for Society*. *Lecture Notes in Computer Science*, Volume 4078, 2009, pp 103-113.
- [13] K. Atkinson, T. Bench-Capon, P. McBurney. *A Dialogue Game Protocol for Multi-Agent Argument over Proposals for Action*. *Autonomous Agents and Multi-Agent Systems*, 11 (2), 153-171, 2005.
- [14] P. McBurney, S. Parsons. *Dialogue Games in Multi-Agent Systems*. *Informal Logic*, 22 (3) (2002), pp. 257–274.
- [15] F. Bellifemine, G. Caire, D. Greenwood. *Developing Multi-Agent Systems with JADE*. Wiley, 2008.
- [16] <http://www.agent-software.com>. *JACK Intelligent Agents—Agent Manual*. *JACK Intelligent Agents—Agent Practicals*.
- [17] B. B. Kristensen. *Rendezvous-Based Collaboration between Autonomous Entities: Centric versus Associative. Concurrency and Computation: Practice and Experience*, vol. 25, no. 3, pp. 289-308, Wiley Press, 2013.